



## Lexmark CS431dw

Productivity. Reliability. Security.



## Lexmark CS431dw

Give every small workgroup bold, consistent colour output with the compact, lightweight Lexmark CS431dw. Built for reliability, performance and security, it prints up to 26 ppm\* and offers expandable input for longer print runs. Take control with a 2.8-inch (7.2 cm) touch screen and connect via Wi-Fi, USB, Ethernet, or the cloud.

### Compact colour power

- ▶ Get colour output at up to 26 pages per minute\*.
- ▶ Tackle your printing workload with the power of a 1-GHz dual-core processor and 512 MB of memory.
- ▶ Compact dimensions of 9.6 inches high x 16.2 inches wide x 15.5 inches deep (243.7 mm high x 411.2 mm wide x 394.1 mm deep) help it fit almost anywhere.



### Connect and command

- ▶ Connect via dual-band Wi-Fi, Gigabit Ethernet, or USB.
- ▶ Simplify mobile printing with the Lexmark Mobile Print app, Google Cloud Print, Mopria®, and AirPrint..
- ▶ Take command of device settings and monitor vital system functions on a 2.8-inch (7.2 cm) colour touch screen.
- ▶ Built-in cloud connectors let you securely access files from popular cloud services Box, DropBox, Google Drive, and Microsoft OneDrive.

### Sustained output, enduring quality

- ▶ Genuine Unison™ replacement toner offers rich, vibrant colour in available Extra High Yield cartridges for more printing and less downtime.
- ▶ Single-piece cartridge simplifies supply replacement for fewer interruptions.
- ▶ Optional input trays increase total input capacity to 751 sheets to support longer print runs and enhanced media flexibility.
- ▶ A steel frame and lifetime imaging components mean long life and minimal maintenance.

### Robust, built-in security

- ▶ Lexmark's full-spectrum security architecture helps keep your information safe—in the document, on the device, over the network, and everywhere in between.


### Save paper, save energy

- ▶ Automatic two-sided printing is standard.
- ▶ Built-in energy-saving modes help support ratings of EPEAT® Silver and ENERGY STAR® certified.
- ▶ The Lexmark Cartridge Collection Programme (LCCP) and Lexmark Equipment Collection Programme (LECP) minimize waste and support recycling (availability varies by country).

\* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

\*\* Average continuous black or continuous composite colour (CMY) declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19798. Actual yield will vary considerably based upon many factors. See [www.lexmark.com/yields](http://www.lexmark.com/yields) for more information.

# Lexmark CS431dw

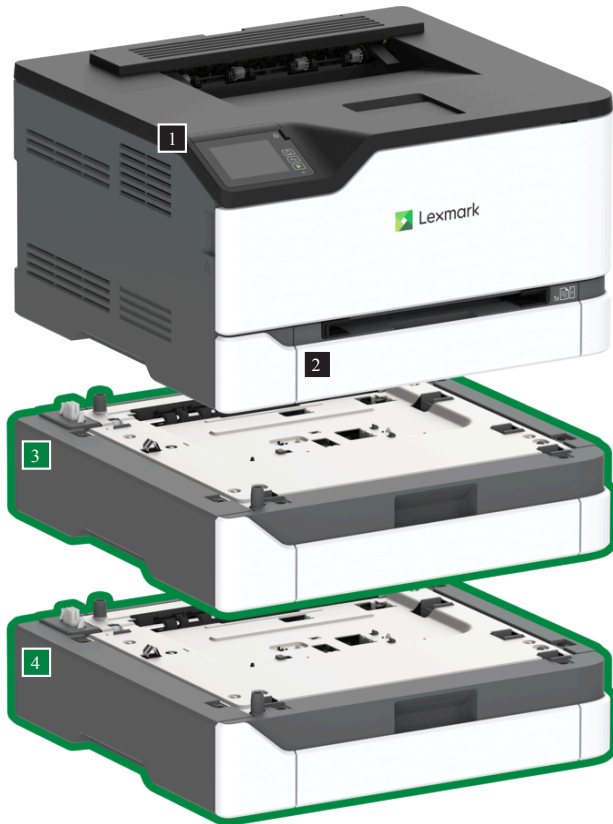

- 1 **Printer with 2.8-inch (7.2 cm) touch screen**  
243.7 x 411.2 x 394.1 mm  
9.6 x 16.2 x 15.5 in.
- 2 **250-Sheet tray**  
Dimensions included as part of base model

- 3 **250-Sheet Tray**  
103.9 x 411.2 x 381.0 mm  
4.1 x 16.2 x 15.0 in.
- 4 **250-Sheet Tray**  
103.9 x 411.2 x 381.0 mm  
4.1 x 16.2 x 15.0 in.



| Product Specifications                      |  | Lexmark CS431dw |
|---|--|-----------------|
| <b>Printing</b>                             |  |                 |
| Display                                     | 2.8 inch (7.2 cm) LCD touch panel  |                 |
| Print Speed                                 | Up to: Black: 26 ppm <sup>1</sup> (Letter) / Colour: 26 ppm <sup>1</sup> (Letter)  |                 |
| Time to First Page                          | as fast as: Black: 10.9 seconds / Colour: 11 seconds   |                 |
| Print Resolution                            | Black: 4800 Colour Quality / Colour: 4800 Colour Quality   |                 |
| Memory                                      | Standard: 512 MB / Maximum: 512 MB   |                 |
| Hard Disk                                   | Not Available  |                 |
| Recommended Monthly Page Volume             | 750 - 5000 pages <sup>2</sup>  |                 |
| Maximum Monthly Duty Cycle                  | Up to: 75000 pages per month <sup>3</sup>  |                 |
| <b>Supplies<sup>4</sup></b>                 |  |                 |
| Laser Cartridge Yields                      | up to: 6,700 <sup>5</sup> -page Colour (CMY) Extra High Yield Cartridges / up to: 6,000 <sup>5</sup> -page Black Extra High Yield Cartridge / up to: 1,500 <sup>5</sup> -page Black and Colour (CMYK) Cartridges |                 |
| Cartridge(s) Shipping with Product          | 1,500 <sup>5</sup> -page Black Return Program Toner Cartridge <sup>5</sup> , 1,500 <sup>5</sup> -page Colour (CMY) Return Program Toner Cartridges <sup>5</sup>  |                 |
| <b>Paper Handling</b>                       |  |                 |
| Included Paper Handling                     | 100-Sheet Output Bin, Integrated Duplex, Single-Sheet Manual Feed, 250-Sheet Input   |                 |
| Optional Paper Handling                     | 250-Sheet Tray   |                 |
| Paper Input Capacity                        | Up to: Standard: 250+1 pages 20 lb or 75 gsm bond / Maximum: 750+1 pages 20 lb or 75 gsm bond  |                 |
| Paper Output Capacity                       | Up to: Standard: 100 pages 20 lb or 75 gsm bond / Maximum: 100 pages 20 lb or 75 gsm bond  |                 |
| Media Types Supported                       | Paper Labels, Card Stock, Plain Paper, Envelopes, Glossy paper, Refer to the Paper & Specialty Media Guide   |                 |
| Media Sizes Supported                       | A6, Oficio, 7 3/4 Envelope, 9 Envelope, JIS-B5, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, Statement, C5 Envelope, Executive, Universal, DL Envelope, Folio, 10 Envelope                                   |                 |
| <b>General Information<sup>6</sup></b>      |  |                 |
| Standard Ports                              | 802.11ac Wireless, USB 2.0 Specification Hi-Speed Certified (Type B), Ethernet 10/100/1000 BaseTX (RJ-45)  |                 |
| Noise Level                                 | Operating: 51/53 dBA (Print)   |                 |
| Specified Operating Environment             | Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 3048 meters / Temperature: 10 to 32°C (50 to 90°F)  |                 |
| Limited Warranty                            | See Statement of Limited Warranty: 1-Year Onsite Repair, Next Business Day   |                 |
| Size / Weight                               | H x W x D: 243.7 x 411.2 x 394.1 mm / 16.1 kg  |                 |
| ENERGY STAR Typical Electricity Consumption | TEC: 0.36 kilowatt-hours per week  |                 |

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

<sup>1</sup> Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: [www.lexmark.com/ISOspeeds](http://www.lexmark.com/ISOspeeds).

<sup>2</sup> "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. <sup>3</sup> "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. <sup>4</sup> Product functions only with replacement cartridges designed for use in a specific geographical region. See [www.lexmark.com/regions](http://www.lexmark.com/regions) for more details. <sup>5</sup> Average continuous black or continuous composite CMY declared cartridge yield up to this number of standard pages in accordance with ISO/IEC 19798. <sup>6</sup> Printers are sold subject to certain license/agreement conditions. See [www.lexmark.com/printerlicense](http://www.lexmark.com/printerlicense) for details.

© 2020 Lexmark. All rights reserved.

Lexmark, the Lexmark logo and Unison are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries. Google Cloud Print is a trademark of Google, LLC. MOPRIA®, the Mopria® Logo™ and the Mopria® Alliance logos are registered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorized use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT® is a trademark of the Green Electronics Council in the United States and other countries. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).

