



Lexmark MX931dse

Powerful, large-format addition to your printer fleet



Lexmark MX931dse

The Lexmark MX931dse large-format mono multifunction is designed for security, versatility and performance for large workgroups at speeds up to 35 pages per minute*. Two-sided scanning and a 17.78 cm tablet-like touchscreen make handling your scan and print jobs easy.



- ▶ Finishing options include a staple finisher and a staple hole punch finisher.

Secure by design

- ▶ Lexmark security features help keep your information safe - in the document, on the device, over the network and at all points in between.
- ▶ Always improving security, we now include a standard Trusted Platform Module***, which delivers authentication, system integrity checks, and cryptographic capabilities to create a unique digital system fingerprint.

Productivity is in the box

- ▶ It Includes workflow solutions like Scan Centre for simple document routing, Optical Character Recognition (OCR), and the Intelligent Storage Drive (ISD) for solid state storage with activation-ready preloaded add-on solutions.
- ▶ A large, button-free touchscreen helps users intuitively complete every task, from the basic to the complex.
- ▶ Replacement cartridges yield up to 37,000 pages**.

Flexible input and output

- ▶ Print and scan paper sizes up to A3 (297 x 420 mm).
- ▶ Standard input capacity is 620 pages. Optional trays expand the paper input capacity up to 5,140 pages.

Always focused on sustainability

- ▶ MX931dse is designed for the circular economy.
- ▶ Automatic two-sided printing is standard, along with built-in energy-saving modes that help support ratings of EPEAT® Silver and ENERGY STAR® certified.

Power up with IoT

- ▶ Our sophisticated, IoT-enabled printers are loaded with sensors that continuously monitor hundreds of data points.
- ▶ When you connect your device to Lexmark Cloud Services, you can optimise performance and uptime with additional features like predictive service and automatic supplies replenishment.


This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

* Print speeds measured in accordance with ISO/IEC 24734 (ESAT). For more information see: www.lexmark.com/ISOspeeds.

** Average continuous mono declared yield in one-sided (simplex) mode up to this number of pages in accordance with ISO/IEC 19752. Actual yield will vary considerably based upon many factors. See www.lexmark.com/yields for more information.

*** The Trusted Platform Module (TPM) is not available in some countries.

Lexmark MX931dse

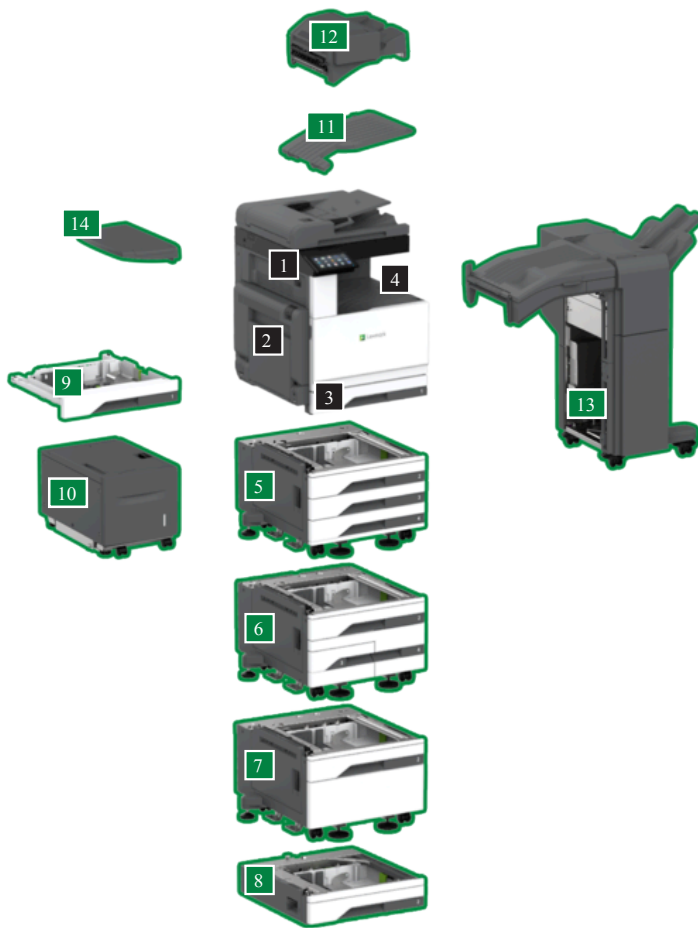

- 1 **Multifunction product with 17.8 cm touch screen**
767.9 x 590 x 699.3 mm
- 2 **100-Sheet multipurpose feeder**
Dimensions included as part of base model
- 3 **520-Sheet tray**
Dimensions included as part of base model
- 4 **400-Sheet output bin**
Dimensions included as part of base model
- 5 **3 x 520-Sheet Tray with Caster**
381.6 x 615.7 x 620 mm
- 6 **2,520-Sheet Tandem Tray with Caster**
381.6 x 615.7 x 620 mm
- 7 **520-Sheet Tray with Caster Cabinet**
381.6 x 615.7 x 620 mm, 381.6 x 615.7 x 620 mm
- 8 **520 Sheet Tray**
133.5 x 540 x 586 mm

- 9 **Envelope Tray**
160 x 684 x 664 mm
- 10 **2,000-Sheet Tray (sidecar)**
491 x 751 x 526 mm
- 11 **Dual Catch Bin**
123 x 447 x 378 mm
- 12 **Inline Staple Finisher**
238 x 478 x 460.5 mm
- 13 **Staple (2/3) Hole Punch Finisher**
983 x 962 x 653 mm
- 14 **Work Table**
58 x 301 x 486 mm



P/N	Hardware
32D0061	Lexmark MX931dse
P/N	Supplies
63D0H00	Lexmark MX931 Black 37K Toner Cartridge
63D0Z00	Lexmark MX931 Black 81.5K Imaging Unit
P/N	Paper Handling
32D0800	520-Sheet Tray
32D0801	520-Sheet Tray with Caster Cabinet
32D0802	3 x 520-Sheet Tray with Casters
32D0803	2,520-Sheet Tandem Tray with Casters
32D0804	Envelope Tray
32D0816	2,000-Sheet Tray (sidecar)
32D0818	Dual Catch Bin
32D0820	Inline Staple Finisher
32D0821	Staple (2/3) Hole Punch Finisher
32D0822	Staple (2/4) Hole Punch Finisher
P/N	Memory Options
27X0400	500+ GB Hard Disk
P/N	Application Solutions
57X0300	Contact Authentication Device
57X0301	Contactless Authentication Device
82S1203	IPDS License
82S1204	Bar Code License
P/N	Connectivity
1021294	USB (2 Meter) Cable
27X6410	Lexmark MarkNet N8372 802.11 a/b/g/n/ac Wireless Print Server
57X7040	English Keyboard Kit
P/N	Furniture
32D0808	CX93x/MX93x Work Table

You can install one of the following: the Dual Catch Bin or the Inline Staple Finisher or the Staple Hole Punch Finisher. To install the Staple Hole Punch Finisher, you must also install the 520-Sheet Tray with Caster Cabinet, the 3x520-Sheet Tray with Casters, or the 2,520-Sheet Tandem Tray with Casters. To install the 2,000-Sheet Tray (sidecar), you must also install the 3x520-Sheet Tray with Casters or the 2,520-Sheet Tandem Tray with Casters. It will not work with the 520-Sheet Tray with Caster Cabinet. To install the Envelope Tray, you must remove Tray 1 and replace it with the Envelope Tray.

Product Specifications

Lexmark MX931dse

Printing	
Display	Lexmark e-Task 7-inch (17.8 cm) colour touch screen
Print Speed	Up to: Black: 35 ppm ¹ (A4)
Time to First Page	As fast as: Black: 4.5 seconds
Print Resolution	Black: 1200 x 1200 dpi, 600 x 600 dpi, 1200 IQ (1200 x 600 dpi)
Memory	Standard: 4096 MB / Maximum: 4096 MB
Hard Disk	Intelligent Storage Drive included; Magnetic Hard Disk (optional)
Recommended Monthly Page Volume	4,000 - 20,000 pages ²
Maximum Monthly Duty Cycle	Up to: 150 000 pages per month ³
Copying	
Copy Speed	Up to: Black: 35 cpm ¹ (A4)
Time to First Copy	as fast as: Black: 6.4 seconds
Scanning	
Scanner Type / ADF Scan	Flatbed scanner with automatic document feeder / RADF (reversing Duplex)
A4/Ltr Duplex Scan Speed / Duplex Scan Speed (A4/Ltr)	Up to: Black: 27.5/27.5 sides per minute / Colour: 27.5/27.5 sides per minute
A4/Ltr Simplex Scan Speed / Scan Speed (A4/Ltr)	Up to: Black: 55/55 sides per minute / Colour: 55/55 sides per minute
ADF Paper Input Capacity	Up to: 110 pages 75 gsm bond
Supplies ⁴	
Laser Cartridge Yields	up to: 37,000 ⁵ -page Black Cartridge
Imaging Unit Estimated Yield	Up to: 81,500 pages, based on 3 average letter/A4-size pages per print job and ~ 5% coverage
Cartridge(s) Shipping with Product	18,500 ⁵ -page Black Toner Cartridge ⁵
Paper Handling	
Included Paper Handling	100-Sheet Multipurpose Feeder, 400-Sheet Output Bin, 520-Sheet Tray
Optional Paper Handling	520-Sheet Tray/Caster Cabinet, 520-Sheet Tray, Inline Stapler, Dual Catch Bin, Envelope Tray, 3 x 520-Sheet Tray/Caster, Staple Punch Finisher, 2520-Sheet Tandem Tray/Caster, Work table, 2000-Sheet Tray
Paper Input Capacity	Up to: Standard: 620 pages 75 gsm bond / Maximum: 5140 pages 75 gsm bond
Paper Output Capacity	Up to: Standard: 400 pages 75 gsm bond / Maximum: 2000 pages 75 gsm bond
Media Types Supported	Labels, Card Stock, Plain Paper, Envelopes, Glossy paper, Refer to the Paper & Specialty Media Guide
Media Sizes Supported	A6, Oficio, 7 3/4 Envelope, JIS-B4, 9 Envelope, JIS-B5, A3, Ledger, A4, Legal, A5, Hagaki Card, Letter, B5 Envelope, C4 Envelope, Statement, C5 Envelope, Executive, DL Envelope, Folio, 10 Envelope
General Information	
Standard Ports	Gigabit Ethernet (10/100/1000), Front USB 2.0 Specification Hi-Speed Certified port (Type A), Rear USB 2.0 Specification Hi-Speed Certified port (Type A), USB 2.0 Specification Hi-Speed Certified (Type B)
Optional Network Ports	Marknet N8372 WiFi Option
Noise Level	Operating: 51 dBA (Print) / 56 dBA (Copy) / 55 dBA (Scan)
Specified Operating Environment	Humidity: 8 to 80% Relative Humidity / Altitude: 0 - 2500 metres / Temperature: 10 to 32°C (50 to 90°F)
Product Warranty	1-Year Onsite Repair, Next Business Day
Size / Weight	H x W x D: 767.9 x 590 x 699.3 mm / 53 kg
ENERGY STAR Typical Electricity Consumption	TEC: 0.52 kilowatt-hours per week

All information is subject to change without notice. Lexmark is not liable for any errors or omissions.

¹ Print and copy speeds measured in accordance with ISO/IEC 24734 and ISO/IEC 24735 respectively (ESAT). For more information see: www.lexmark.com/ISOspeeds.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage. ³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs. ⁴ Product functions only with replacement cartridges designed for use in a specific geographical region. See www.lexmark.com/regions for more details. ⁵ Average standard page yield value declared in accordance with ISO/IEC 19752.

This is a Class A device according to international electromagnetic emissions standards (i.e. FCC Rules, EN 55022/EN 55032, etc.). Class A products are intended for use in non-residential/non-domestic environments. Use of a Class A product in residential/domestic environments may cause interference to radio communications and require corrective measures.

© 2022 Lexmark. All rights reserved.

Lexmark and the Lexmark logo are trademarks of Lexmark International, Inc., registered in the United States and/or other countries.

Apple and AirPrint are trademarks of Apple Inc., registered in the U.S. and other countries and regions. MOPRIA®, the Mopria® Logo, and the Mopria Alliance™ word mark and logo are registered and/or unregistered trademarks and service marks of Mopria Alliance, Inc. in the United States and other countries. Unauthorised use is strictly prohibited. ENERGY STAR and the ENERGY STAR mark are registered trademarks owned by the U.S. Environmental Protection Agency. EPEAT is a trademark of the Green Electronics Council in the United States and other countries. PANTONE® is the property of Pantone LLC. All other trademarks are the property of their respective owners.

This product includes software developed by the OpenSSL Project for use in the Open SSL Toolkit (<http://www.openssl.org/>).



lexmark.co.id